

# **KEEPING YOU IN CHARGE**







# PSC-1212000ACX 12V 12A

**Sealed Lead Acid Battery Charger ACX Battery Charger Series** 

# **FEATURES**

- Universal input voltage range 90VAC 240VAC
- Automatic, current sensing dual-rate charging for efficient, care-free and safe operation
- LED indicators
- Universal leads & plugs

## **APPROVALS**

- Approved for transport by air. D.O.T., I.A.T.A.,
- F.A.A. and C.A.B. certified
- ISO9001:2015 Quality management systems
- ETL
- DOE
- **FCC**
- CE

### PERFORMANCE SPECIFICATIONS

#### Input Specs

AC input voltage rating 100Vac-240Vac AC input frequency rating 50Hz-60Hz 90Vac-240Vac AC input voltage range AC input frequency range 47Hz-63Hz

AC input current 3.0A@115Vac/1.8A@230Vac

230W AC input power AC static state current 0 15A

#### **Output Specs**


10-15Vdc Output voltage range Output power 180W 12A@12Vdc Bulk charge current rating 14.7Vdc Bulk charge voltage rating 13.2Vdc Float charge voltage rating Light switching current 2.4A

#### **General Specs**

75% Efficiency <18A Over load protection Short circuit protection Yes Reversed polarity connectors protection Yes 0°C-40°C Operating temperature Storage temperature -30°C-85°C Net weight 1.5kg 208\*130\*82mm Dimensions

Enclosure Metal Case Application Indoor Charger type Wall mounting

# **CHARGER CHARACTERISTICS**

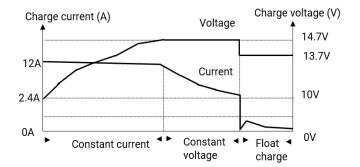

#### **GLOBAL HEADOUARTERS** (USA AND INTERNATIONAL EXCLUDING EMEA)

**Power-Sonic Corporation** 

365 Cabela Dr Suite 300, Reno, Nevada 89439 USA

T: +1 775 824 6500

E: customer-service@power-sonic.com

# **POWER-SONIC EMEA**

(EMEA – EUROPE, MIDDLE EAST AND AFRICA)

Smitspol 4, 3861 RS Nijkerk, The Netherlands

T NL: + 31 33 7410 700 TUK: +44 1268 560 686 TFR: +33 344 32 18 17

E: salesEMEA@power-sonic.com

## Safety Specs

3000Vac ≤ 10mA (60s) Withstand voltage (Hi-Pot) >100MΩ @500Vdc Insulation resistance ETL/CE Safety standard FCC Compliance

### **LED Indicator Status**

Green LED on No load or float charge Red LED on Fast charge

## **INPUT PLUGS & OUTPUT**

Part Number	Input Plug	Output Connection
PSC1212000ACX-US	NEMA-A	Alligator Clips
PSC1212000ACX-EU	CEE-C	Alligator Clips
PSC1212000ACX-UK	BS-G	Alligator Clips

## **FURTHER INFORMATION**

Please refer to our website www.power-sonic.com for a complete range of useful downloads, such as product catalogs, safety data sheets, ISO certification, etc.