



Specifications

Nominal Voltage	6V
Rated Capacity (20-hour rate)	3.3Ah
Dimensions	
Length	134±1mm (5.28inch)
Width	34±1mm (1.34inch)
Height	61±1mm (2.40inch)
Total Height	67±1mm (2.64inch)
Approximate Weight	0.62kg (1.37lbs)±5%

Outer Dimensions

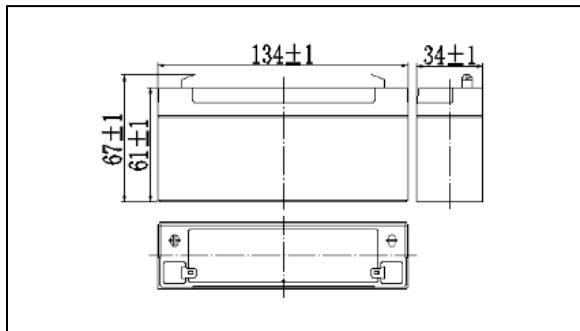

Terminal Type

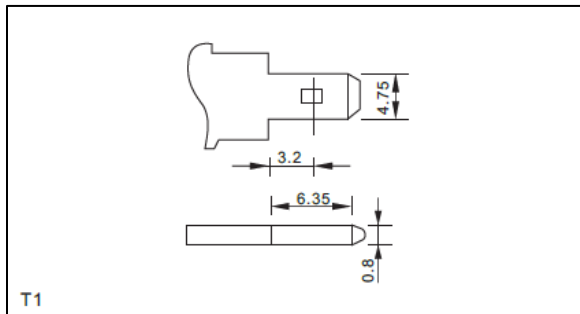

Characteristics

Capacity (25°C)	
20HR (3.50V)	3.3Ah
10HR (3.50V)	3.0Ah
1HR (3.20V)	2.0Ah
Terminal Type	F1
Internal Resistance	Approx. 25m Ω
Capacity affected by temperature (20HR)	
40°C	102%
25°C	100%
0°C	85%
-15°C	65%
Self-Discharge (25°C)	
3 months	Remaining Capacity: 91%
6 months	Remaining Capacity: 82%
12 months	Remaining Capacity: 65%
Nominal operating temperature	25°C±3°C (77°F±5°F)
Operating Temperature range	
Discharge	-15°C~50°C (5°F~122°F)
Charge	-10°C~50°C (14°F~122°F)
Storage	-20°C~50°C (-4°F~122°F)
Float charging voltage (25°C)	6.75 to 6.90V Temperature compensation: -9mV/°C
Cyclic charging voltage (25°C)	7.25 to 7.50V Temperature compensation: -15mV/°C
Maximum charging current	0.96A
Maximum discharge current	48A (5 sec.)
Designed Floating Life (20°C)	5 years

Construction

Component	Positive Plate	Negative Plate	Container	Cover	Separator	Electrolyte	Safety Valve	Terminal
Raw Material	Lead Dioxide	Lead	ABS	ABS	AGM	Sulfuric Acid	Rubber	Copper

Constant Current Discharge Characteristics


F.V/Time	5min	10min	15min	30min	60min	2h	3h	4h	5h	10h	20h
4.80V	12.2	7.74	6.05	3.41	2.10	1.15	0.79	0.66	0.56	0.30	0.16
4.95V	11.9	7.51	5.90	3.34	2.06	1.14	0.79	0.65	0.55	0.30	0.16
5.10V	11.4	7.20	5.69	3.24	2.01	1.13	0.78	0.65	0.55	0.30	0.16
5.25V	10.9	6.89	5.49	3.16	1.97	1.11	0.78	0.64	0.55	0.30	0.16
5.40V	10.3	6.50	5.20	3.04	1.91	1.08	0.75	0.62	0.53	0.29	0.16

Constant Power Discharge Characteristics


F.V/Time	5min	10min	15min	30min	60min	2h	3h	4h	5h	10h	20h
4.80V	68.2	43.7	34.5	19.5	12.1	6.71	4.71	3.91	3.33	1.82	0.97
4.95V	66.2	42.4	33.6	19.1	12.0	6.67	4.68	3.88	3.31	1.81	0.97
5.10V	63.4	40.6	32.4	18.6	11.7	6.61	4.65	3.86	3.29	1.80	0.97
5.25V	60.7	38.9	31.3	18.1	11.4	6.51	4.62	3.83	3.27	1.79	0.96
5.40V	57.3	36.7	29.6	17.4	11.1	6.34	4.48	3.72	3.17	1.76	0.94

*Note: The above characteristics data can be obtained within three charge or discharge cycles.


Discharge Characteristics

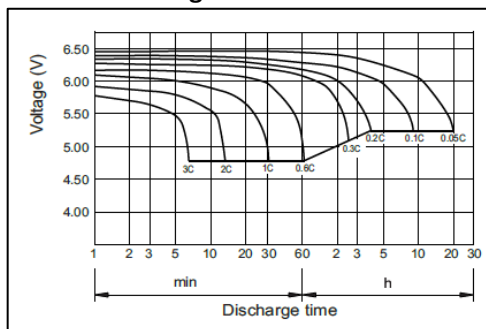


Charging Characteristics

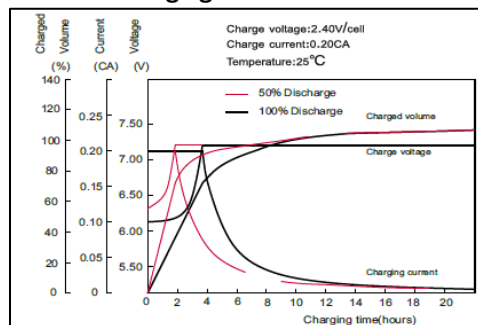


Effect of Temperature on Capacity

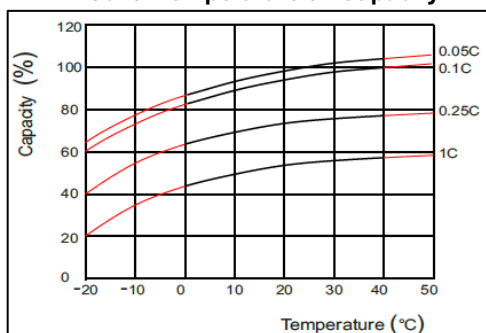


Self-discharge Characteristics

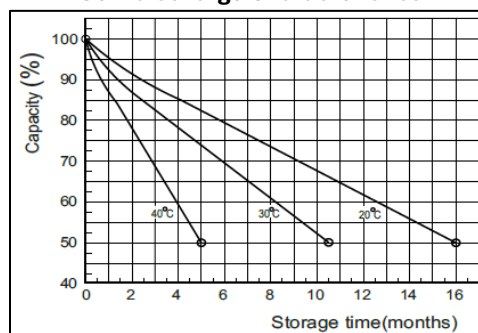


Floating Life on Temperature

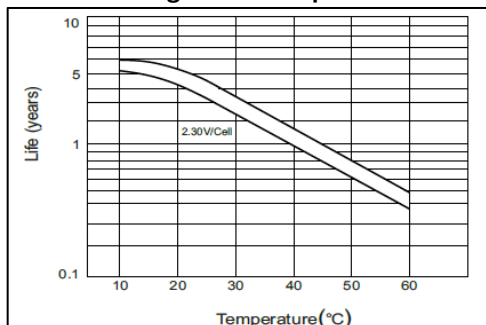

Cycle Life on D.O.D

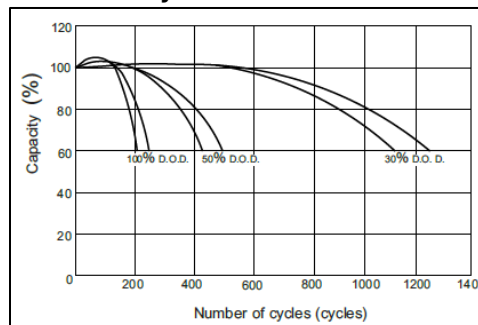

Relationship for OCV and Capacity

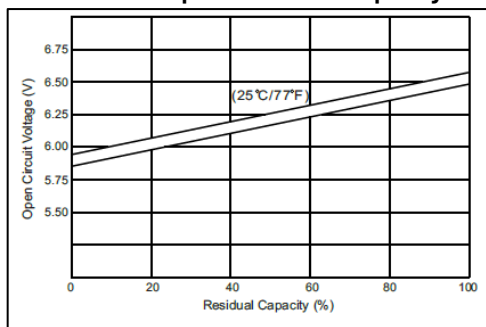

Relationship for Charging voltage and Temperature

